


LS2 Series




Barcode Label Scale

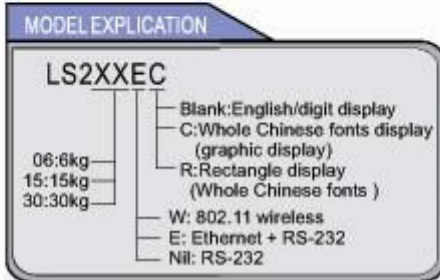

- Fast, reliable and accurate weighing
- Latest head-up display design with side mount printer
- Easy to read LCD (liquid crystal display)
- Ergonomic wash down keyboard, 28 function keys, 224 pre-set keys (hotkeys) with audible beep. Innovative removable and renewable keypad, can be easily replaced within seconds. Fast and efficient single entry push of a key for product recall. The keyboard configuration can be freely edited by the PC application and printed out immediately
- High definition print head, adjustable to prolong print head life
- Custom label design software
- Large stainless steel weigh platter
- Standard ETHERNET connectivity
- High capacity PLU storage – 5000 (expandable)
- Flash memory for quick and efficient upgrades or changes to software

User Friendly – Simple to Use – All you need

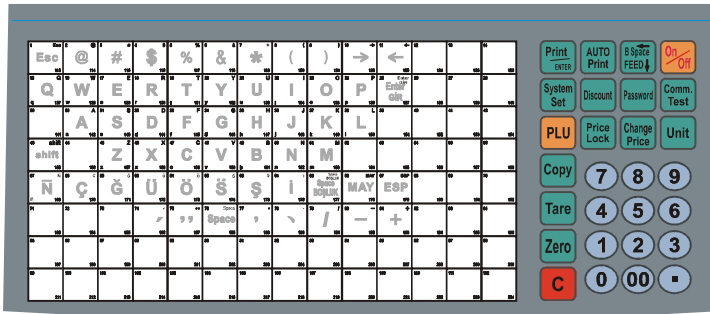

- Full ETHERNET - TCP-IP protocol for download and upload of data

Maximum Capacity	15 kg
Readability	0-6 kg x 2g 6-15 kg x 5g
LCD display	Double-faced, auto back-light LCD 1st line: 5 Alpha Numeric Description
Memory Capacity / PLU's	Standard 2Mb / 5120 (expandable)
Printing Speed	50mm/s (light density)
Thermal Printer Head	56mm width - LABEL or TALLY ROLL
Label Size	Max. 56mm (W) x 109mm (L)
Printing Contents	PLU name, EAN13 barcode, weight, unit price, total price, packed on date, expiry date, store name
Power Supply	AC18V 1.5A (AC115V/220V/240V 50/60Hz Adaptor)
Power Consumption	Sleep mode: 3W - Printing Mode: 30W
Operating temperature	0°C ~ +40°C - less than 80% RH
Weight	8.6 kg

- Password protected for security purposes
- Link32, PLU Manager and Label Design software standard with scale
- Scheduled downloads and uploads at specific programmable times from PC software
- Sales Message and Ingredient label formats available

